

Model 22W

Model 22W

Active Gauge | Compact Vacuum Transmitter



Active Gauge Vacuum Transmitter

No-Tools Required To Replace Sensor


- **Active Gauge**—vacuum transmitter measures full range of rough vacuum pinpointing either gross or fine process errors or leaks | Measures from 1 micron to 760,000 microns (760 Torr) or atmosphere | Includes RS232 and 5 Volt analog output
- **Efficient**—designed with no moving parts for durability and reliability/ No mounting is required
- **Replaceable sensor**—field-replaceable allowing for longer transmitter life
- **Calibrated**—Every Model 22W is calibrated and pretested under actual vacuum against a NIST standard
- **Applications**—freeze dryers, refrigeration systems assembly lines, vacuum ovens, laboratory

Model 22W has a compact electronic package that fits right on top of the vacuum tube.

There is no need to take up valuable benchtop or panel space!

Simple Set-Up of Vacuum Process Telemetry:

- Plumb the vacuum gauge tube into your vessel
- Plug in the Model 22W on top of the gauge tube
- Run the low voltage power wire (provided) to the gauge
- Run the digital signals

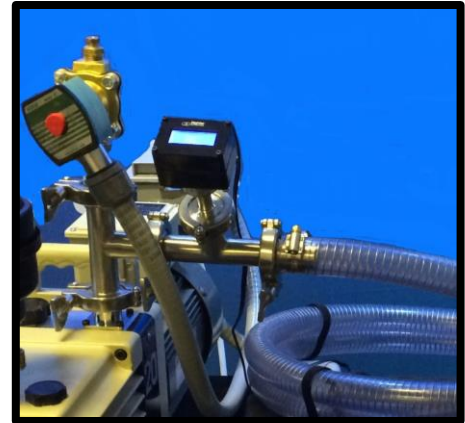

Specifications

Power:	100-240VAC 50/60 Hz CE Rated										
Vacuum Interface:	1/8" Male NPT or KF/NW										
Sensor:	Varian 531 or CE Rated Varian 536										
Range:	.001 – 760 Torr										
Units:	Order as: Torr, Micron, Millitorr, or mbar										
Accuracy:	<table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">1~99 millitorr</td> <td style="width: 50%;">+/- 2 millitorr or 20%</td> </tr> <tr> <td>100~2000 millitorr</td> <td>+/- 10%</td> </tr> <tr> <td>2 ~ 6 Torr</td> <td>+/- 25%</td> </tr> <tr> <td>6~250 Torr</td> <td>Continuous and monotonic</td> </tr> <tr> <td>250 ~ 800 Torr</td> <td>+/- 25%</td> </tr> </table>	1~99 millitorr	+/- 2 millitorr or 20%	100~2000 millitorr	+/- 10%	2 ~ 6 Torr	+/- 25%	6~250 Torr	Continuous and monotonic	250 ~ 800 Torr	+/- 25%
1~99 millitorr	+/- 2 millitorr or 20%										
100~2000 millitorr	+/- 10%										
2 ~ 6 Torr	+/- 25%										
6~250 Torr	Continuous and monotonic										
250 ~ 800 Torr	+/- 25%										
Mount	Sensor mounted										
Wetted Parts:	Nickel, Copper, Constantan										
Display (LCD version only)	16 Digit character display										
Dimensions	1.6" x 1.8" x 2.4"										
Analog output	(if applicable): 0-5 Volts linear or linear by decade										

Options: LCD Display | 536/CE rated tube | Measurement Units

RS232 output: can be used to graph and plot historical data with the **DigiVac plotting software**, and as a vacuum transmitter to a PLC or other device.